

FIG. 1

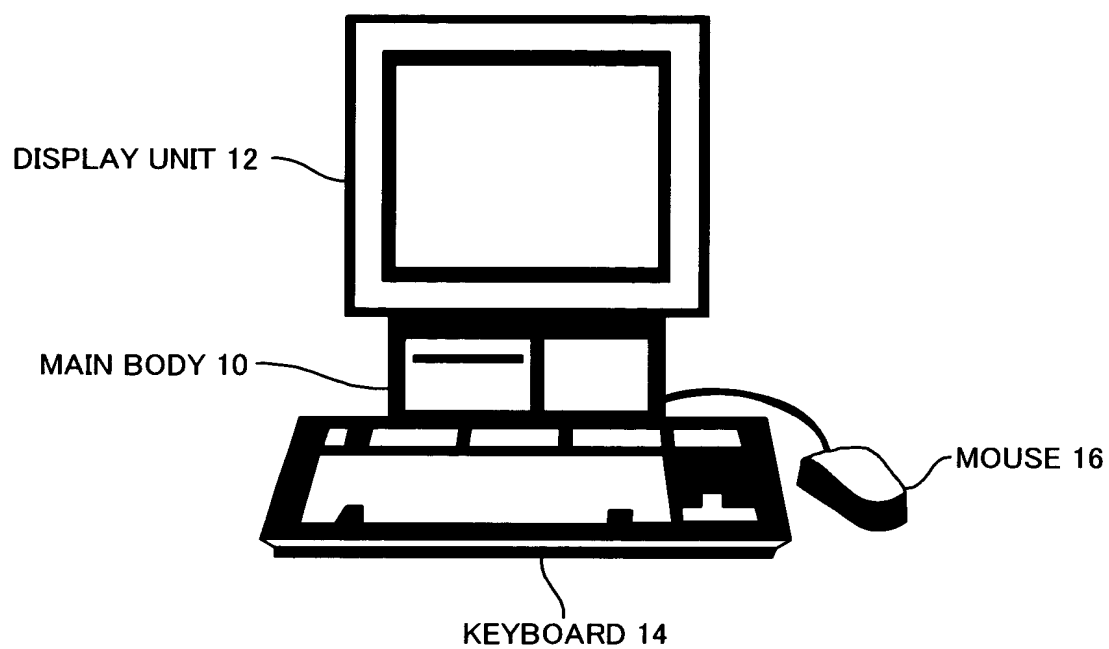


FIG. 2

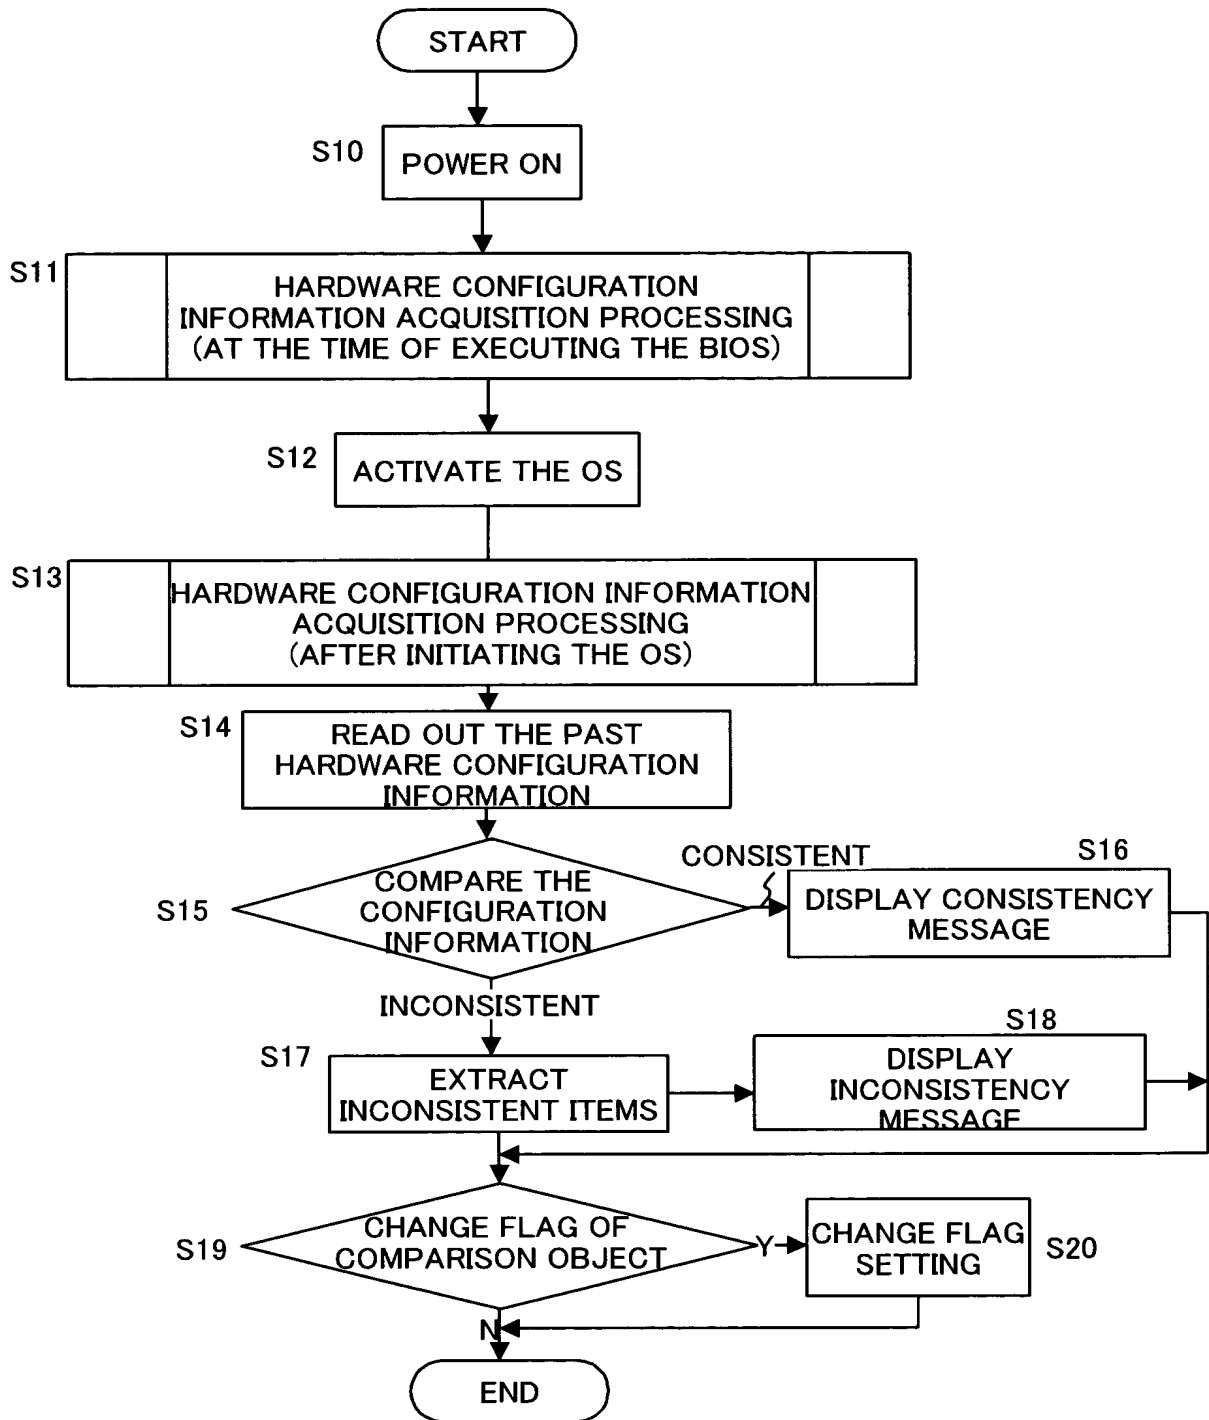


FIG. 3

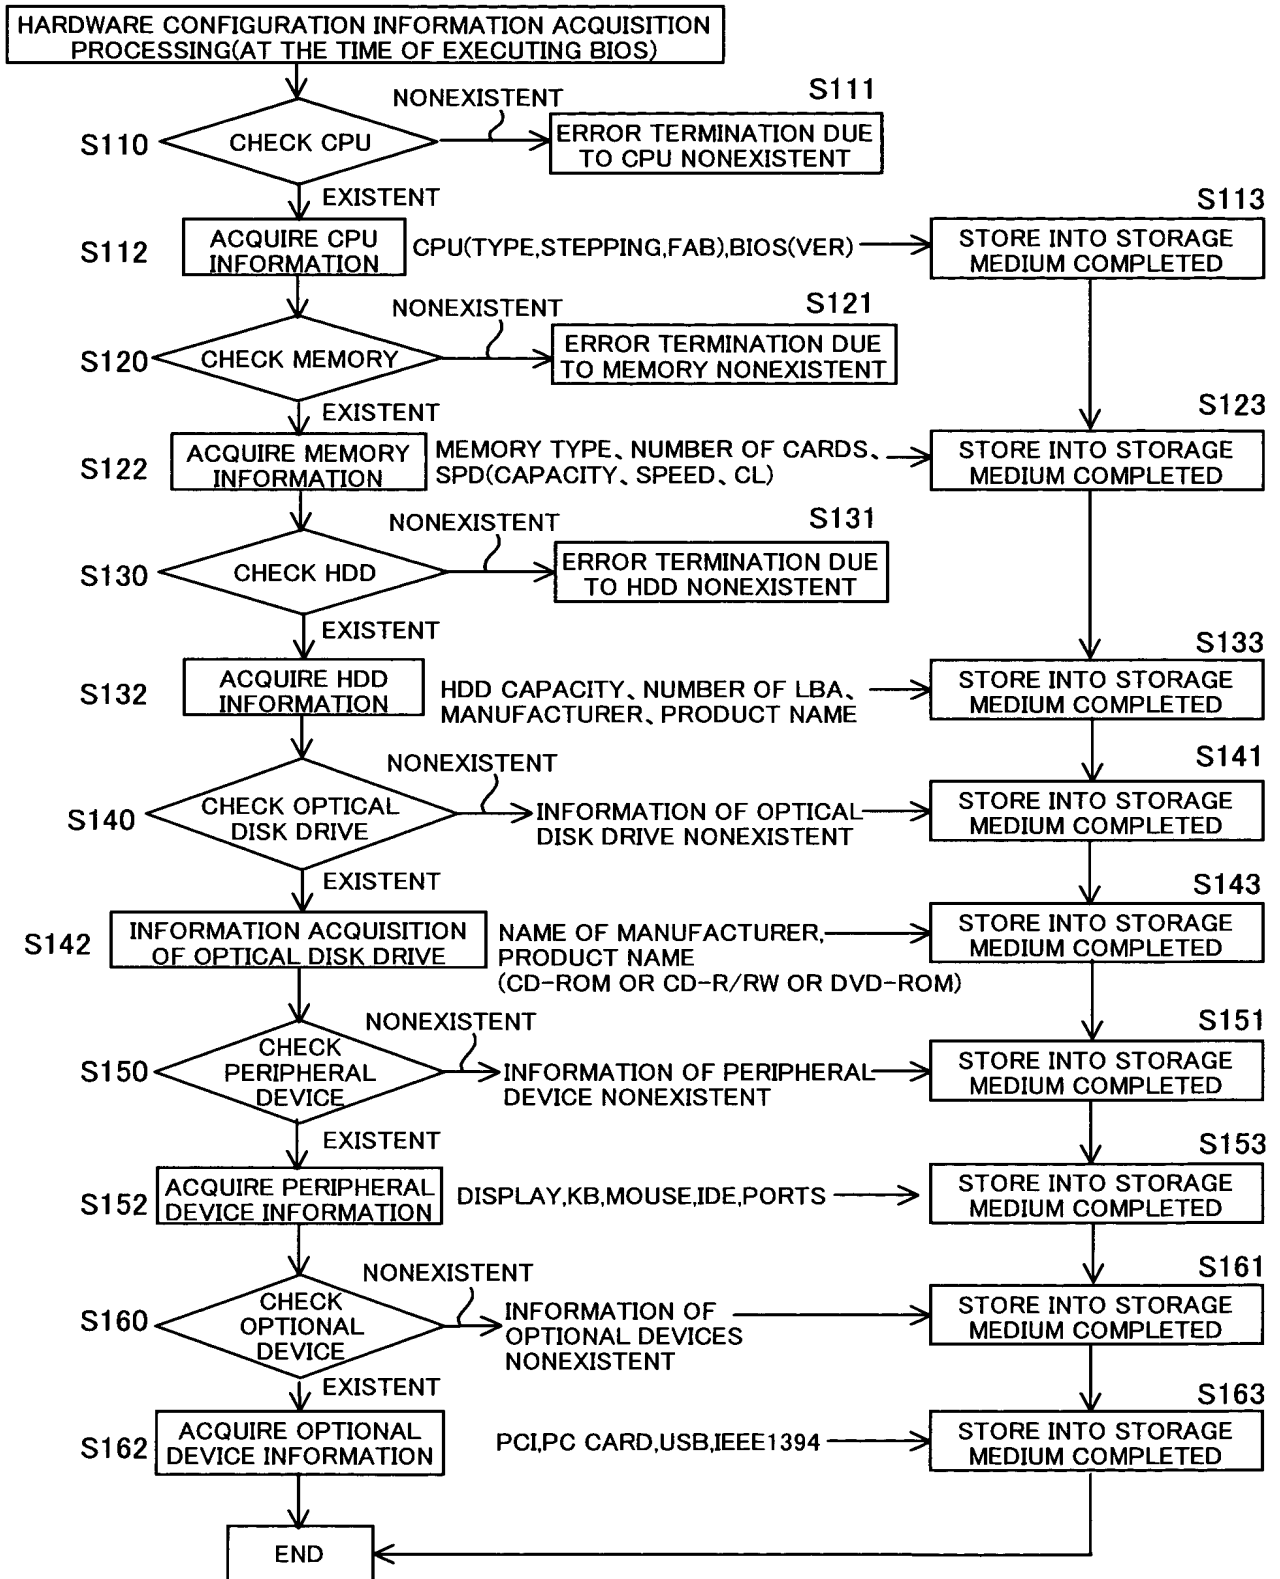


FIG. 4

HARDWARE CONFIGURATION INFORMATION ACQUIRED AT THE TIME OF EXECUTING BIOS

(a) CPU INFORMATION

CPU : Pentium3-1BGHz,C0 stepping,FAB-E
BIOS : v1.21

(b) MEMORY INFORMATION

Memory : DIMMx2
Slot1=128MB,PC133,CL2
Slot2=256MB,PC133,CL2

(c) HDD INFORMATION

HDD : IDEx2
Primary-Master=20416MB,2607780,Fujitsu,PB16E
Primary-Slave=40020MB,4A8B570,Fujitsu,PB16E

(d) INFORMATION OF OPTICAL DISK DRIVE

Optical Disk Drive : IDEx1
Secondary-Master=Toshiba Combi Drive SD-R1002

(e) INFORMATION OF PERIPHERAL DEVICE

Device :
Display=VL-17WDX1G
Keyboard=USB OneTouchKeyx4 Compact Wireless 109 KB
Mouse=USB scroll Wireless Mouse
IDE=Fujitsu GIGA MO FMC-PD6
Serial Port=Fijitsu FMTA-103

(f) INFORMATION OF OPTIONAL DEVICE

Option :
PCI :
Slot1=FMV-1802 LAN Adapter
Slot2=FMV-127A SCSI Adapter
PC Card :
Slot1=FUJIFILM 32MB SmartMedia MG-32SW
USB :
Port1=Wireless Module
Port2=Fujitsu color page Printer XL-C3100
IEEE1394 :
Port1=Panasonic NV-C7

FIG. 5

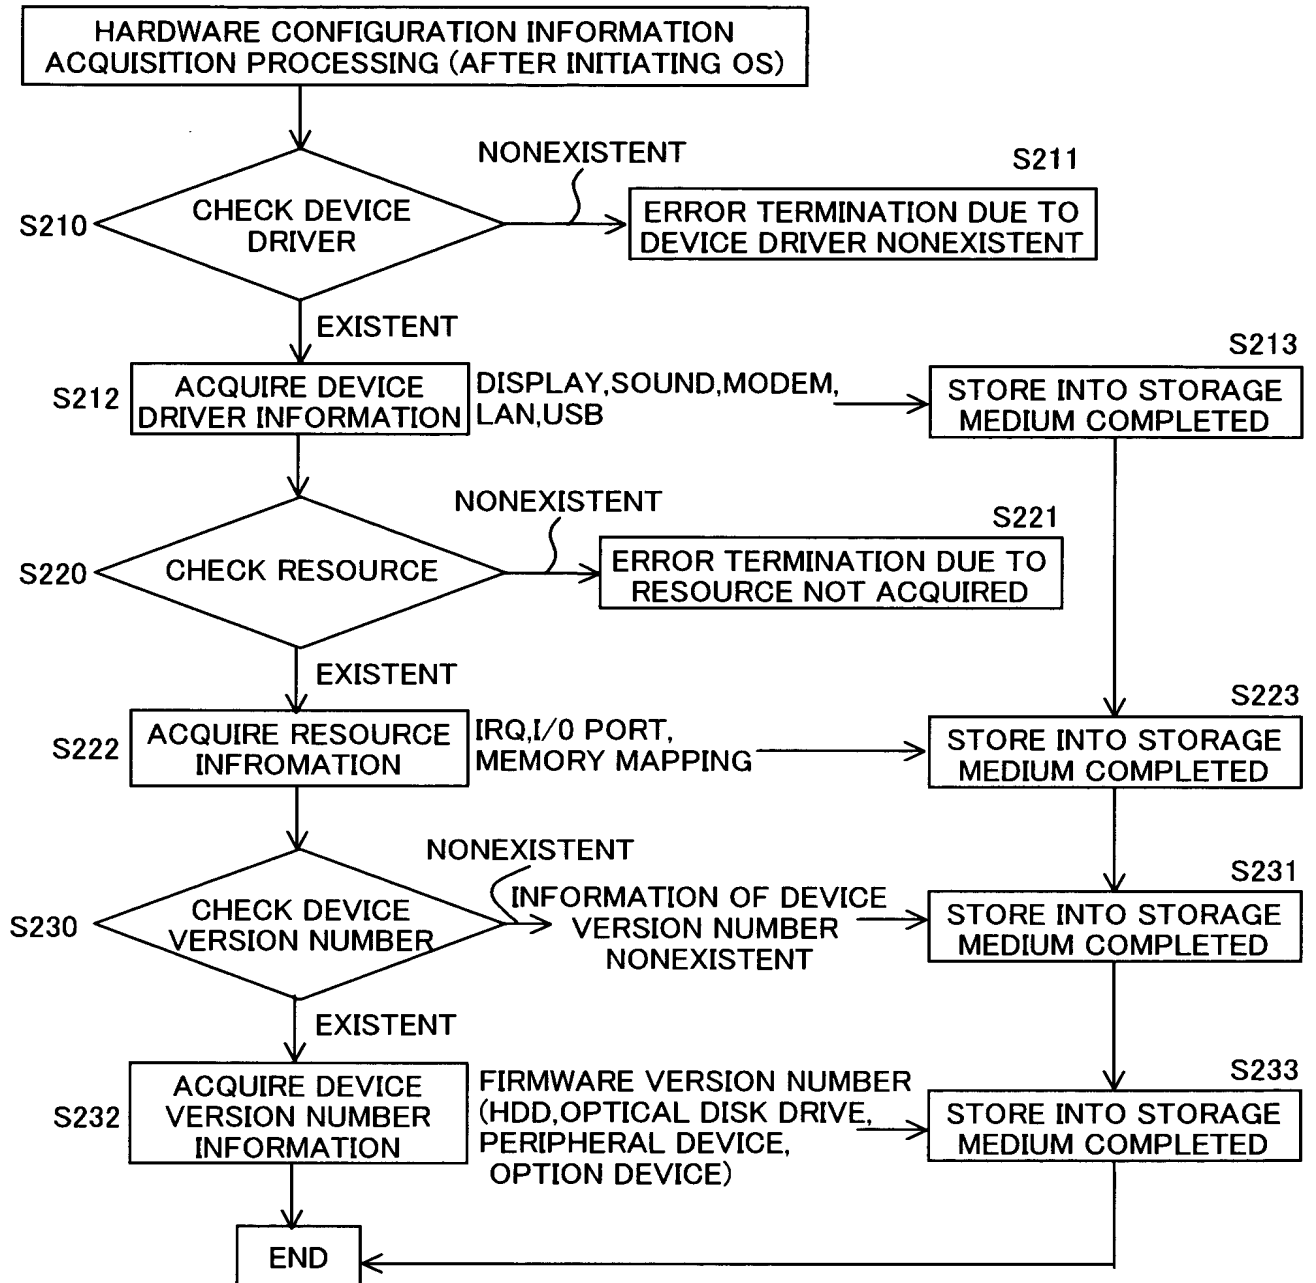


FIG. 6

HARDWARE CONFIGURATION INFORMATION ACQUISITION PROCESSING AFTER INITIATING THE OS

(a) DEVICE DRIVER INFORMATION

Device Driver :

Display=Intel(R) 810e Windows(R) 2000 Display Driver V5.12.01.2636

Sound=Crystal CS4299 WDM Audio Driver for Windows2000 V5.12.4026 L10

Modem=FMV-FX52Z2/FMV-FX52Z2(A) Windows2000 DRIVER V2.30 B2009

LAN=Intel(R) 8255x-based PCI Ethernet Adapter Windows(R) 2000 LAN Driver V5.00.67

SCSI=FMC-SCS3 V3.03

(b) RESOURCE INFORMATION

Resource :

IRQ0=DMA,IRQ1=IDE,

INT0=Timer0,INT1=Timer1,

I/O Port :

0000h=SerialPort0,0002h=SerialPort1,0010h-007Fh=USB,

Memory :

0000h-01FFh=Kernel,0200h-03FFh=INT13,

(c) INFORMATION OF DEVICE VERSION NUMBER

HDD : IDEx2

Primary-Master=20416MB,2607780,Fujitsu,PB16E [FirmwareVersion=paso007]

Primary-Slave=40020MB,4A8B570,Fujitsu,PB16E [FirmwareVersion=paso006]

Optical Disk Drive : IDEx1

Secondary-Master=Toshiba Combi Drive SD-R1002 [FirmwareVersion=1.04.3324]

Device :

Display=VL-17WDX1G [FirmwareVersion=Ver.1.10]

Keyboard=USB OneTouchKeyx4 Compact Wireless 109 KB [FirmwareVersion=v1.0]

Mouse=USB scroll Wireless Mouse [FirmwareVersion=v1.0]

IDE=Fujitsu GIGA MO FMC-PD6 [FirmwareVersion=1025]

Serial Port=Fujitsu FMTA-103 [FirmwareVersion=1.30]

Option :

PCI :

Slot1=FMV-1802 LAN Adapter [BIOS Version=1.1]

Slot2=FMV-127A SCSI Adapter [BIOS Version=1.24]

PC Card :

Slot1=FUJIFILM 32MB SmartMedia MG-32SW

USB :

Port1=Wireless Module [FirmwareVersion=v1.0]

Port2=Fujitsu color page Printer XL-C3100 [FirmwareVersion=0.12]

IEEE1394 :

Port1=Panasonic NV-C7 [FirmwareVersion=v1.0]

FIG. 7

HARDWARE CONFIGURATION INFORMATION		<input type="button" value="—"/>	<input type="button" value="□"/>	<input type="button" value="X"/>
MENU DISPLAY				
<p>CONSISTENT HADWARE CONFIGURATION INFORMATION HAS BEEN ACQUIRED.</p> <div><p>LIST OF ACQUIRED HARDWARE CONFIGURATION INFORMATION ITEMS</p></div> <p>DO YOU WANT TO SET THIS HARDWARE CONFIGURATION INFORMATION AS AN OBJECT FOR COMPARISON?</p> <div><input type="button" value="YES"/><input type="button" value="NO"/></div>				

(a)

HARDWARE CONFIGURATION INFORMATION		<input type="button" value="—"/>	<input type="button" value="□"/>	<input type="button" value="X"/>
MENU DISPLAY				
<p>INCONSISTENT HARDWARE CONFIGURATION INFORMATION HAS BEEN DETECTED</p> <p>INCONSISTENT HARDWARE CONFIGURATION INFORMATION ITEMS</p> <p>MEMORY slot2 NONEXISTENT→256MB,PC133,CL2 Serial port NONEXISTENT→○○tsu FMTA-103 PCIslot1 NONEXISTENT→FMV-1802 LAN Adapter PCIslot2 NONEXISTENT→FMV-127A SCSI Adapter PCcard slot1 NONEXISTENT→○○FILM 32MB SmartMedia MG-32SW USBport2 NONEXISTENT→○○tsu ColorPrinter XL-C3100</p> <p>DO YOU WANT TO SET THIS HARDWARE CONFIGURATION INFORMATION AS AN OBJECT FOR COMPARISON?</p> <div><input type="button" value="YES"/><input type="button" value="NO"/></div>				

(b)

FIG. 8

EXAMPLE OF HARDWARE CONFIGURATION INFORMATION ACQUIRED AT THE TIME OF EXECUTING BIOS (ACQUIRED IN THE PAST)

(a) CPU INFORMATION

CPU : Pentium3-1BGHz,C0 stepping,FAB-E
BIOS : v1.10

(b) MEMORY INFORMATION

Memory : DIMMx1
Slot1=128MB,PC133,CL2
Slot2=*

(c) HDD INFORMATION

HDD : IDEx1
Primary-Master=20416MB,2607780,Fujitsu,PB16E
Primary-Slave=*

(d) INFORMATION OF OPTICAL DISK DRIVE

Optical Disk Drive : IDEx1
Secondary-Master=Toshiba Combi Drive SD-R1002

(e) INFORMATION OF PERIPHERAL DEVICE

Device :
Display=VL-17WDX1G
Keyboard=USB OneTouchKeyx4 Compact Wireless 109 KB
Mouse=USB scroll Wireless Mouse
IDE=Fujitsu GIGA MO FMC-PD6
Serial Port=*

(f) INFORMATION OF OPTIONAL DEVICE

Option :
PCI :
Slot1=*
Slot2=*
PC Card :
Slot1=*
USB :
Port1=Wireless Module
Port2=*
IEEE1394 :
Port1=Panasonic NV-C7

FIG. 9

EXAMPLE OF HARDWARE CONFIGURATION INFORMATION ACQUIRED AFTER INITIATING OS (ACQUIRED IN THE PAST)

(a) DEVICE DRIVER INFORMATION

Device Driver :

Display=Intel(R) 810e Windows(R) 2000 Display Driver V5.12.01.2586

Sound=Crystal CS4299 WDM Audio Driver for Windows2000 V5.12.4026 L10

Modem=FMV-FX52Z2/FMV-FX52Z2(A) Windows2000 DRIVER V2.30 B2007

LAN=Intel(R) 8255x-based PCI Ethernet Adapter Windows(R) 2000 LAN Driver V5.00.67

SCSI=FMC-SCS3 V3.03

(b) RESOURCE INFORMATION

Resource :

IRQ0=DMA,IRQ1=IDE,

INT0=Timer0,INT1=Timer1,

I/O Port :

0000h=SerialPort0,0002h=SerialPort1,0010h-007Fh=USB,

Memory :

0000h-01FFh=Kernel,0200h-03FFh=INT13,

(c) INFORMATION OF DEVICE VERSION NUMBER

HDD : IDEx1

Primary-Master=20416MB,2607780,Fujitsu,PB16E [FirmwareVersion=paso007]

Primary-Slave=*

Optical Disk Drive : IDEx1

Secondary-Master=Toshiba Combi Drive SD-R1002 [FirmwareVersion=1.04.3324]

Device :

Display=VL-17WDX1G [FirmwareVersion=Ver.1.10]

Keyboard=USB OneTouchKeyx4 Compact Wireless 109 KB [FirmwareVersion=v1.0]

Mouse=USB scroll Wireless Mouse [FirmwareVersion=v1.0]

IDE=Fujitsu GIGA MO FMC-PD6 [FirmwareVersion=1025]

Serial Port=Fijitsu FMTA-103 [FirmwareVersion=1.30]

Option :

PCI :

Slot1=*

Slot2=*

PC Card :

Slot1=*

USB :

Port1=Wireless Module [FirmwareVersion=v1.0]

Port2=*

IEEE1394 :

Port1=*

FIG. 10

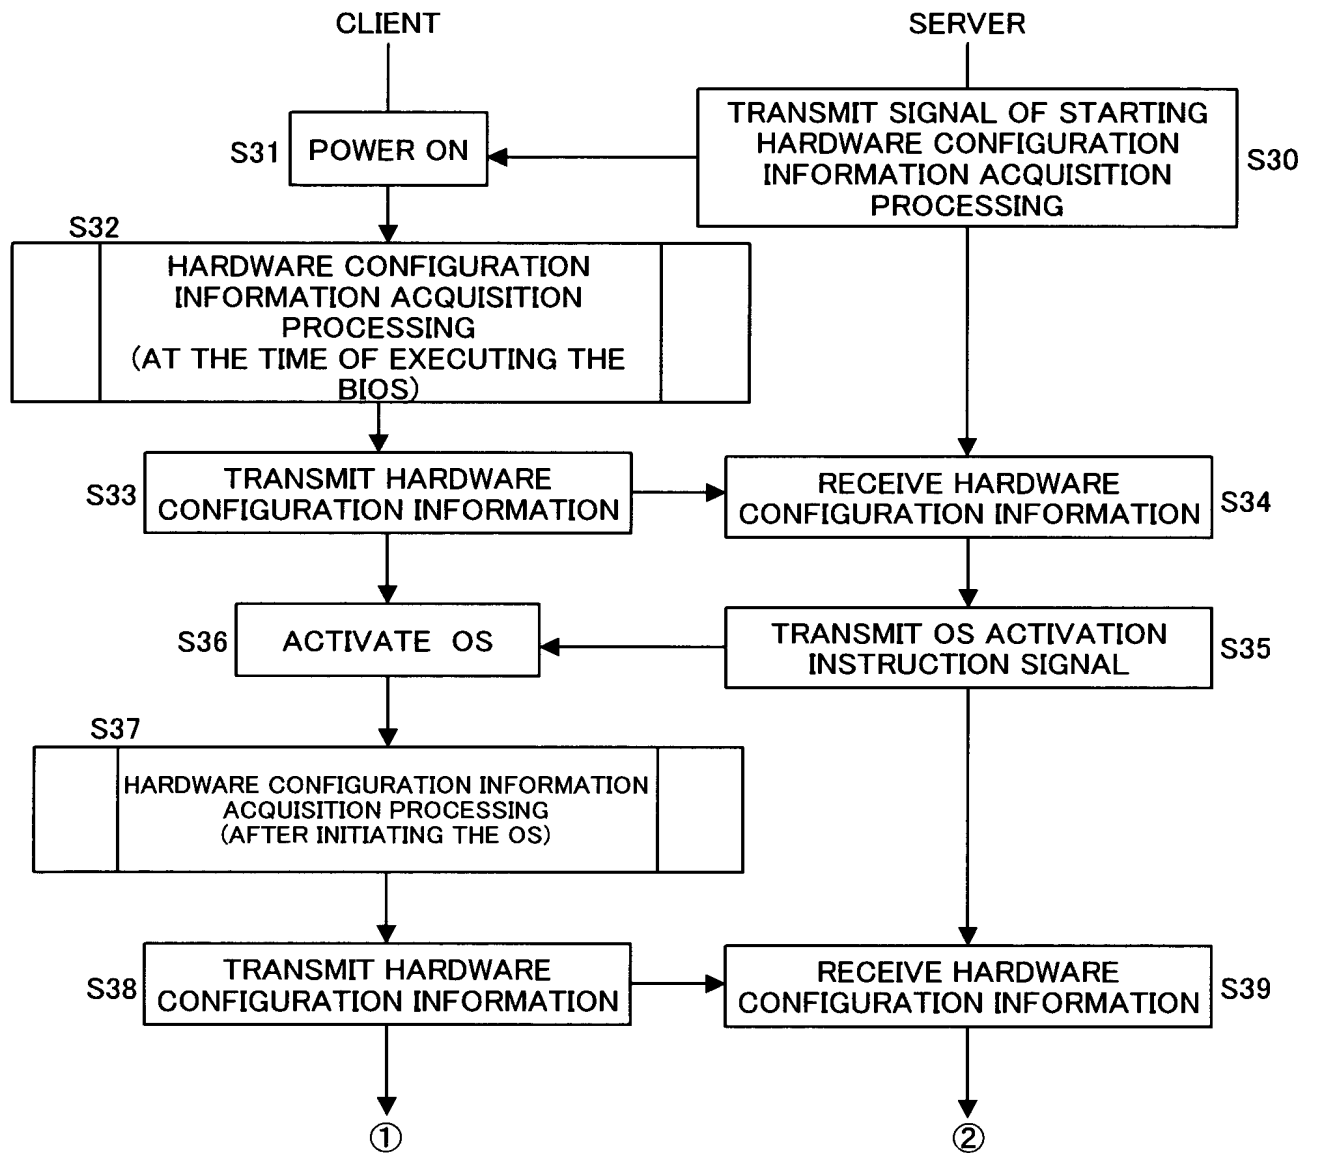


FIG. 11

